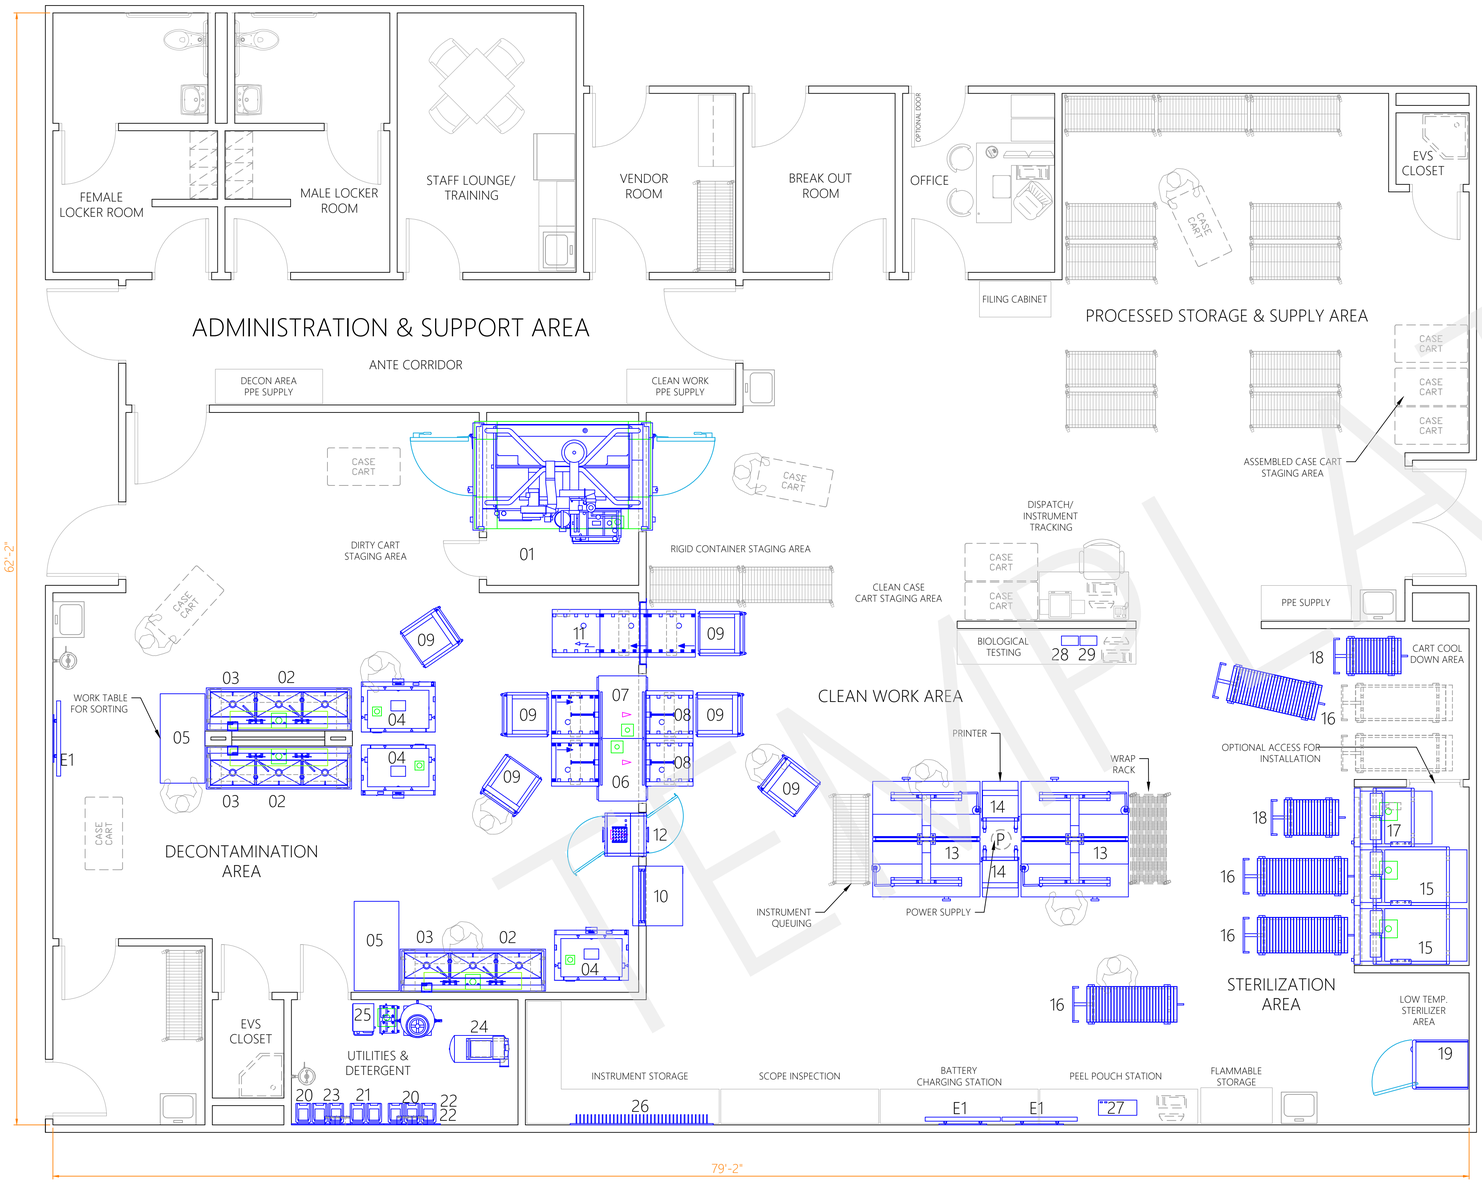

EQUIPMENT LIST		
TAG	QTY	DESCRIPTION
01	1	Reliance 1227 Cart and Utensil Washer/Disinfector - Double Door/Pit Mounted/Steam Heat/Vented
02	3	Amsco 50 Reprocessing Sink - 3 Bay/97.5" Long/Height Adjustable
03	3	STERIS Acu-sinQ 2 Chemistry Dosing System (Must be within 4' of power outlet)
04	3	InnoWave PRO Sonic Irrigator - 60 Lumen Capacity
05	2	STERIS Work Table - 30x60x36"
06	1	Amsco 7052HP Single-Chamber Washer/Disinfector - Double Door/Steam Heat/Vented/Flush Mounted
07	1	Amsco 7052HP Single-Chamber Washer/Disinfector - Double Door/Steam Heat/Acu-Rinse/Non-Vented/Flush Mounted/Reverse Install
08	2	SCS Load/Unload Conveyor System - Single Load/Single Unload
09	6	Reliance Transfer Cart
10	1	STERIS Automated Pass-Through Window - Endoscopy Application (40x45" Window)
11	1	SCS Motorized Return Conveyor System - 3 Module/Return Door/Flush Mounted
12	1	Amsco Drying Cabinet - 29"/Double Door/Pass-Thru (110-120 Volt/20 Amp Dedicated Wall Plug)
13	2	Amsco Deluxe Prep and Pack Workstation - 36x72"/Electric Height Adjustable/Back-to-Back
14	2	STERIS ErgoStat Mobile Cart
15	2	Amsco 600 Medium Steam Sterilizer - 26.5x26.5x63" (673x673x1600mm)/Single Sliding Door/Recessed/Steam Heat
16	4	Amsco 600 Loading Car and Transfer Carriage - 26.5x26.5x63"/Fixed Height
17	1	Amsco 600 Medium Steam Sterilizer - 26.5x26.5x39" (673x673x991mm)/Single Sliding Door/Recessed/Steam Heat
18	2	Amsco 600 Loading Car and Transfer Carriage - 26.5x26.5x39"/Fixed Height
19	1	Amsco V-PRO Max Low Temperature Sterilization System - Single Door/Cabinet/Set of (4) Locking Casters (200-208/230V, 50/60Hz, 16A, (3) Phase/6 ft. power cord included)
20	2	Acu-Hold System - Wall Mounted/3 Container
21	1	Acu-Hold System - Wall Mounted/2 Container
22	2	STERIS Dosing System - 3 Pumps (Included with Washer/Power supplied by Washer)
23	1	STERIS Dosing System - 5 Pumps (Included with Washer/Power supplied by Washer)
24	1	Amsco Model STS 050142 Rotary Scroll Air Compressor - 5 HP/30 Gallon Tank/460 Volt/6.3 Amp
25	1	AmeriWater Model 00HC-2045 Water Treatment System - RO1 Reverse Osmosis System/Deionizer Polisher/20 GPM Flow/55 Gallon Tank
26	1	Amsco Instrument Board with Pegs
27	1	Rennco LiftSealer - Heat Sealer
28	1	Celerity HP Incubator - 11.40 Wide x 6.30 Deep x 3.70 High/Use Celerity 20 HP Biological Indicators
29	1	VERIFY Incubator - 11.40 Wide x 6.30 Deep x 3.70 High/Use VERIFY Assert Self-Contained Biological Indicators
E1	3	VividImage W 55" Medical Grade Display - Wall Mounted
P	1	Power 120 VAC (Not by STERIS)

SQUARE FOOTAGE	
DECONTAMINATION AREA	1100 SQFT
CLEAN WORK AREA	1075 SQFT
STERILIZATION AREA	600 SQFT
STORAGE AND SUPPLY AREA	615 SQFT
ADMINISTRATION & SUPPORT AREA	950 SQFT
UTILITIES AND DETERGENT ROOM	90 SQFT
EVS CLOSET	25 SQFT EA.

PROCESSING CAPACITY INFORMATION	
NUMBER OF TRAYS	200
HOURS OF OPERATION	8 HOURS

*TEMPLATE NOTE: THIS LAYOUT IS INTENDED TO ENCOURAGE DISCUSSIONS FOR AN INTEGRATED DESIGN PROCESS. FOR A COMPREHENSIVE CAPACITY ASSESSMENT AND OPTIMIZED DESIGN FOR YOUR PROCESSING DEPARTMENT, PLEASE CONTACT YOUR LOCAL STERIS REPRESENTATIVE

STERIS drawings do not supersede the drawings from the architect of record.
STERIS drawings do not supersede the drawings from the architect of record.

STERIS
Healthcare Design Group
5960 Heisley Road
Mentor, OH 44060 USA
800-548-4873

STERILE PROCESSING DEPARTMENT
PROPOSED EQUIPMENT LAYOUT

STERILE PROCESSING DEPARTMENT DESIGN TEMPLATE
200 TRAY

TEMPLATE

DR	JZT	CK	MEJ	DATE	31MAR2023
SCALE	NOT TO SCALE			PAGE	01